


EVERSTAB LS-944

EVERSTAB LS-944GF

Chemical Name Poly{[6- [(1,1,3,3-tetramethyl butyl)amino]-1,3, 5-triazine-2,4-diy] [(2,2,6,6-tetramethyl-4-piperidiny)imino]-1,6-hexanediyl[(2,2,6,6-tetramethyl-4-piperidiny)imino]}

Structure

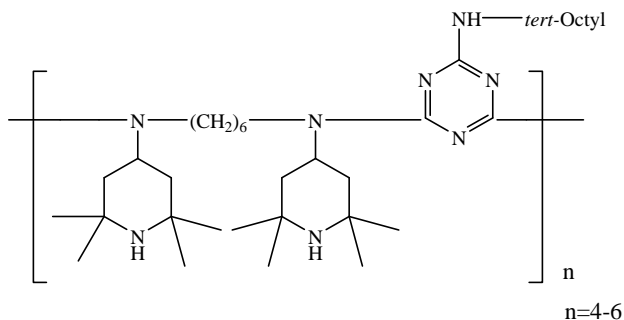


CAS Number 71878-19-8 or 70624-18-9

Specification	<u>Criterion</u>	<u>Requirement</u>
	Appearance	White to light yellow granules
	Volatiles	1.0% max
	Color of solution (transmission) 10g in 100 ml toluene (after filtration)	at 425 nm 95% min at 450 nm 96% min
	Softening range	105-135°C
	Molecular Weight (Mn)	2000-3300
	Ash	0.1% max

Applications It is recommended for various applications which require high light stabilization of polymers including PP. HDPE. ABS. PS. PMMA. SAN. PVC. Nylon. Polyesters. Polyacetal ETC. Main applications are-Polypropylene fibers; Polypropylene tapes; LDPE film; EVA film.

Packing 40 kgs Net / Fiber drum inner PE bag.



妙春實業股份有限公司
EVERSPRING CHEMICAL CO., LTD.

台中市工業區 24 路 4 號
4, 24th Road, Industrial Park, Taichung, Taiwan
Tel : +886-4-23592448 Fax : +886-4-23593163
E-mail : sales@everspringchem.com.tw
Web site : www.everspringchem.com